


RUBY-9716VGAR

Intel® Core™ 2 Quad processor based ATX Motherboard with DDR2 SDRAM, VGA, Gigabit Ethernet, Audio and USB

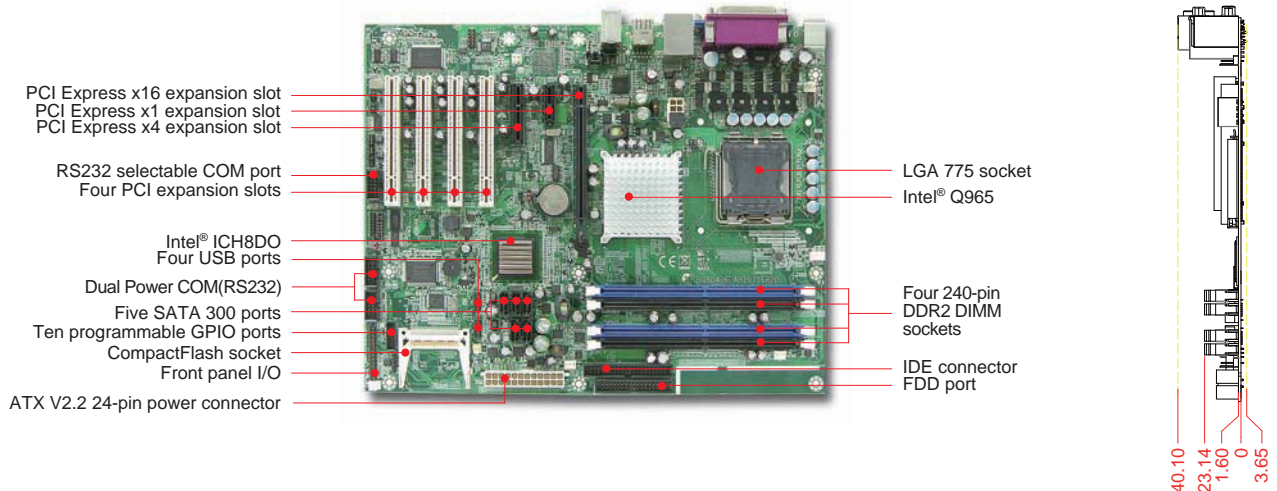


Built with Intel® Q965 chipset, RUBY-9716VGAR supports Intel® Core™ 2 Duo processor based ATX Industrial Mainboard with DDR2 SDRAM, VGA, Gigabit Ethernet, Audio and USB. In addition, five SATA 300 ports, one IDE channel and CF socket are perfect storage interface for that all kind of applications; supports Intel® Matrix Storage Technology.

FEATURES

- Intel® mainstream desktop processors - Core™ 2 Quad, Core™ 2 Duo, Pentium® D, Pentium® 4, Celeron® D processor in LGA-775 package
- One PCI Express x16 slot features high-end graphics card connection interface or dual independent display with ADD2+ media card that provides TV tuner, video capture in and DVI, TV-out
- One PCI Express x4 slot for storage add-in card which provides reliable and safer data storage with adequate I/O throughput
- Five SATA 300 ports together with one IDE channel and CF socket are perfect combination

REAR I/O



ORDERING GUIDE

AB1-3018	RUBY-9716VGAR.Socket LGA775.Intel Q965.Core 2 Duo.IMB.w/VGA/GbE/Audio
-----------------	---

PACKING LIST

One RUBY-9716VGAR ATX Industrial Main Board
One SATA II Cable
One Installation CD
One I/O shield



GENERAL

Processor	- Intel® Core™ 2 Quad/Core™ 2 Duo Pentium® D, Pentium® 4, Celeron® D Processor with 2MB L2 Cache in LGA-775 package - FSB:1333/1066/800MHz - Support Enhanced Intel SpeedStep® Technology, Intel® 64 architecture, Execute Disable Bit (Core™ 2 Duo only)
Chipset	Intel® Q965 Graphics and Memory Controller Hub (28W)+ICH8DO
BIOS	Award BIOS
Memory	Support up to 8GB DDR2 533/667/800MHz SDRAM on four 240-pin DIMM sockets
Storage Devices	- 1x EIDE connector supports Ultra DMA100/66/33MB/s - 5x SATA 300 drivers support 3Gb/s data transfer rate and 1x FDD channel - 1x compact Flash connector supports Ultra DMA100/66/33MB/s (share with IDE channel)
Watchdog Timer	Programmable via S/W from 1 sec. to 255 min.
Hardware Monitoring	- System monitor (fan,temperature,voltage) and Temperature (CPU & System) - Voltage (CPU Vcore, 5VSB, 12V, 5V, 3.3V)
Expansion Interface	- 1x PCI Express x4 slot for x1 or x4 card (Gen1, 2.5 GT/s) - 1x PCI Express x1 slot (Gen1, 2.5 GT/s) - 1x PCI Express x16 slot for PCIe x16 or PCIe x1 or ADD2/+ card (Gen1, 2.5 GT/s) - 4x PCI 32bit slots

I/O INTERFACE

Super IO	Winbond W83627HG-AW
Audio	- Intel® Q965 built-in High Definition Audio up to 192-kHz 32-bit - Realtek ALC262-VC2 LQFP48 codec,2+2 channels - Audio Jack DIP Light Pink/Lime/Light Blue
Ethernet	- Intel® 82566DM single gigabit ethernet controller - 1x RJ-45 connectors with two LED indicators at rear I/O panel - PCI Expressx1 interface based Gigabit Ethernet
Serial Port	- 1x RS232/TTL selectable on rear I/O panel - 2x RS232 Power selectable on board and 1x RS232/422/485 selectable on board
USB	- 4x USB 2.0 ports on rear IO and 4x USB 2.0 ports on board - 480 Mb/s bus comprehends the high-speed / full-speed / low-speed data ranges
Keyboard & Mouse	1x PS/2 Keyboard & Mouse on rear IO
GPIO	On board programmable 10-bit Digital I/Os
Other	1x parallel port on rear IO

DISPLAY

Graphic Controller	- Intel® Q965 Graphics and Memory Controller Hub integrated Intel Graphics Media Accelerator 3000(Intel GMA 3000), providing a visually stunning experience optimized for Blu-ray® and HD video - Support dual independent display with ADD2/+ card
Display Interface	- VGA: Resolution up to 2048x1536 @75Hz - DVI-D: up to 1600x1200 @60Hz

Mechanical & Environment

Dimension	304.8(L) x 243.8(W) mm; 12"(L) x 9.6"(W)
Power Supply	- Typical: +12V@6.5A;+5V@5.95A;+3.3V@3A - Support ATX mode
Environment	- Operation Temperature: 0°C to 55°C / - Storage Temperature: -20°C to 80°C - Relative Humidity: 5% to 90%, non-condensing
MTBF	Over 100,000 hours at 40°C